

01-28-00

A

01/27/00
JCS64 U.S. PTO

IN THE UNITED STATES PATENT AND TRADEMARK OFFICE

Applicant: Cary Lee Bates, Paul Reuben Day, John
Matthew Santosuosso

Att'y. Docket: IBM / 116
Client Ref.: RO999-108

Title: AUTOMATED DETECTION OF SPOKEN NUMBERS IN VOICE MESSAGES

CERTIFICATE OF MAILING BY EXPRESS MAIL - 37 CFR 1.10

'Express Mail' mailing label number: EL508263960US
Date of Deposit: January 27, 2000

I certify that this paper or fee (along with the enclosures noted herein) is being deposited with the United States Postal Service 'Express Mail Post Office to Addressee' service under 37 CFR 1.10 on the above date and is addressed to the Assistant Commissioner for Patents, Washington, D.C. 20231


By: Heath R. Bandy (person mailing paper)

JCS64 U.S. PTO
09/491902
01/27/00

UTILITY PATENT APPLICATION TRANSMITTAL

BOX PATENT APPLICATION
Assistant Commissioner for Patents
Washington, D.C. 20231

This is a request for filing, under 37 CFR § 1.53(b), a(n):

- ☒ **Original (non-provisional) application.**
- ☐ Divisional of prior application Serial No. __, filed on __.
- ☐ Continuation of prior application Serial No. __, filed on __.
- ☐ Continuation-in-part of prior application Serial No. __, filed on __.

PRELIMINARY AMENDMENT/CALCULATION OF FEES

- ☐ Please cancel claims __ without prejudice, and prior to calculating the fees. __ total claim(s), of which __ is(are) independent, is(are) pending after the amendment.
- ☐ Please enter the enclosed preliminary amendment identified below prior to calculating the fees. __ total claim(s), of which __ is(are) independent, is(are) pending after the amendment.

☒ **The Fees are Calculated as Follows:**

Fee:	Number of Claims.	In Excess of:	Extra	At Rate:	Amount:
Total Claims	27	20	7	\$18	\$126.00
Independent Claims	6	3	3	\$78	\$234.00
MULTIPLE DEPENDENT CLAIM FEE					
BASIC FEE					\$690.00
TOTAL OF ABOVE CALCULATIONS					\$1,050.00
REDUCTION BY 50% FOR FILING BY SMALL ENTITY					
TOTAL					\$1,050.00

ENCLOSURES

- ☒ Utility Patent Application Transmittal Form (in duplicate) containing Certificate of Mailing By Express Mail Under 37 CFR 1.10.
- ☒ Return Postcard.

APPLICATION PAPERS

- ☒ Utility Patent Application, with: cover sheet, 28 page(s) specification (including 27 total claim(s), of which 6 is(are) independent), and 1 page(s) abstract.
- ☒ Drawings: 6 sheet(s) of formal drawings (9 total figure(s)).
- ☐ Microfiche Computer Program (Appendix).
- ☐ Nucleotide and/or Amino Acid Sequence, including (all are necessary): Computer Readable Copy, Paper Copy (identical to computer copy), and Statement verifying identity of copies.
- ☒ An Executed Declaration, Power of Attorney and Petition Form.
- ☐ Copy of Executed Declaration, Power of Attorney and Petition Form from prior application identified above.
- ☐ Certified Copy of priority document(s) identified as attached above.

ADDITIONAL PAPERS

- ☒ Assignment to INTERNATIONAL BUSINESS MACHINES CORPORATION, Recordation Cover Sheet (Form PTO-1595)
- ☐ Verified Statement to Establish Small Entity Status under 37 CFR 1.9 and 1.27.
- ☐ Preliminary Amendment (to be entered prior to calculation of fees)
- ☐ Information Disclosure Statement, sheet(s) Form PTO-1449, U.S. Patent Reference(s), Foreign Patent Reference(s) and Other Reference(s)
- ☐ Other:


CHECKS

- ☒ A Check of \$1,050.00 for the filing fee.
- ☒ A Check of \$40.00 for the assignment recording fee.

DEPOSIT ACCOUNT AUTHORIZATION

- ☐ Please charge Deposit Account No. 23-3000 in the amount of .
- ☒ The Commissioner is authorized to charge any fees under 37 CFR 1.16 and 1.17 which may be required during the entire pendency of the application, or credit any overpayment, to Deposit Account No. 23-3000. A duplicate of this transmittal is attached.
- ☐ THE PAYMENT OF FEES IS BEING DEFERRED.

Respectfully Submitted,



Scott A. Stunebruner
Reg. No. 38,323

WOOD, HERRON & EVANS, L.L.P.
2700 Carew Tower
Cincinnati, Ohio 45202
(513) 241-2324

SAS/jlv

Express Mail No. EL508263960US

IBM DOCKET: RO999-108
WHE DOCKET: IBM-116

APPLICATION
FOR
UNITED STATES LETTERS PATENT

TITLE: AUTOMATED DETECTION OF SPOKEN NUMBERS IN
VOICE MESSAGES

APPLICANTS: Cary Lee Bates, Paul Reuben Day, and
John Matthew Santosuosso

ASSIGNEE: International Business Machines Corporation

Wood, Herron & Evans, L.L.P.
2700 Carew Tower
Cincinnati, Ohio 45202
513-241-2324

SPECIFICATION

**AUTOMATED DETECTION OF SPOKEN NUMBERS IN VOICE
MESSAGES**

5

Field of the Invention

The invention is generally related to voice messaging and voice recognition technology.

Background of the Invention

10

Voice messaging, e.g., using answering machines, integrated telephone/answering machines, private voice mail systems and public/telecom voice mail systems, is one of the most prevalent tools for conducting personal and business communications. While different voice messaging systems have a wide variety of different features and capabilities, all voice messaging systems at their most basic level support (1) the ability for a sender to create and send a voice or audio message to one or more intended recipients, and (2) the ability for a recipient to playback a voice message destined for that recipient.

15

During the playback of a voice message, a recipient is often able to perform a number of different actions on the message, including fast forwarding or rewinding the message to listen to different points in the message, skipping to earlier or later messages, deleting the message, saving the message, forwarding the message to another user, or replying to the message, among other activities. Often, when a voice messaging system is accessed via a telephone, such activities are performed by depressing specific keys on the telephone keypad while the user is listening to a message.

25

Often, whenever a person leaves a voice message for someone, he or she will provide a telephone number that the sender of the message would like the recipient to

call. Retrieval of a telephone number from a voice message, however, can be problematic in some instances.

In particular, rarely is a recipient ready to write down a telephone number in a voice message the first time the recipient listens to the message. It is common, for example, for many users to listen to a message a first time, and once the message is complete, replay the message in its entirety so that the recipient can transcribe the number spoken in the message. In many instances, however, a voice message may be fairly long, and it can take a significant amount of time to replay the portion of the message containing the desired number. In addition, if the message is garbled or otherwise difficult to hear, a recipient may be required to replay a message several times to make sure that the correct number was transcribed.

Rather than requiring recipients to replay entire messages, some voice messaging systems also support fast forward and rewind functions whereby a recipient is able to skip forward or back by a fixed time interval. Typically, the fast forward and rewind functions are initiated in response to depression of a key on a telephone keypad, and skipping forward or backward in fixed time increments can require several depressions of the keypad to locate the desired location in the voice message. If the keypad is disposed on a telephone headset, a recipient is further inconvenienced due to the fact that the user has to alternately depress a key and listen to the handset to locate the appropriate location in the voice message.

In addition, often a recipient of a voice message will want to immediately dial the number spoken in the message. This often requires that the recipient either memorize or write down the number before disconnecting from the voice messaging system and dialing the number. As a result, dialing the number can be somewhat cumbersome to many users of a voice messaging system.

Some telephones and voice messaging systems may also have at their disposal the telephone number of the person that left the message, e.g., through the use of Caller ID technology or simply due to the fact that the sender has a voice mail box on the same system. While many Caller ID-enabled telephones permit a user to dial a number of a person that called the phone, this capability is of no use should a person

desire to call a telephone number mentioned in a message that was not the telephone number of the telephone used to make the call.

Therefore, a significant need exists in the art for a manner of facilitating the retrieval of spoken numbers from a voice message.

10 11
12 13
14 15
16 17
18 19
20 21
22 23
24 25
26 27
28 29
30 31
32 33
34 35
36 37
38 39
40 41
42 43
44 45
46 47
48 49
50 51
52 53
54 55
56 57
58 59
60 61
62 63
64 65
66 67
68 69
70 71
72 73
74 75
76 77
78 79
80 81
82 83
84 85
86 87
88 89
90 91
92 93
94 95
96 97
98 99
100 101
102 103
104 105
106 107
108 109
110 111
112 113
114 115
116 117
118 119
120 121
122 123
124 125
126 127
128 129
130 131
132 133
134 135
136 137
138 139
140 141
142 143
144 145
146 147
148 149
150 151
152 153
154 155
156 157
158 159
160 161
162 163
164 165
166 167
168 169
170 171
172 173
174 175
176 177
178 179
180 181
182 183
184 185
186 187
188 189
190 191
192 193
194 195
196 197
198 199
200 201
202 203
204 205
206 207
208 209
210 211
212 213
214 215
216 217
218 219
220 221
222 223
224 225
226 227
228 229
230 231
232 233
234 235
236 237
238 239
240 241
242 243
244 245
246 247
248 249
250 251
252 253
254 255
256 257
258 259
260 261
262 263
264 265
266 267
268 269
270 271
272 273
274 275
276 277
278 279
280 281
282 283
284 285
286 287
288 289
290 291
292 293
294 295
296 297
298 299
300 301
302 303
304 305
306 307
308 309
310 311
312 313
314 315
316 317
318 319
320 321
322 323
324 325
326 327
328 329
330 331
332 333
334 335
336 337
338 339
340 341
342 343
344 345
346 347
348 349
350 351
352 353
354 355
356 357
358 359
360 361
362 363
364 365
366 367
368 369
370 371
372 373
374 375
376 377
378 379
380 381
382 383
384 385
386 387
388 389
390 391
392 393
394 395
396 397
398 399
400 401
402 403
404 405
406 407
408 409
410 411
412 413
414 415
416 417
418 419
420 421
422 423
424 425
426 427
428 429
430 431
432 433
434 435
436 437
438 439
440 441
442 443
444 445
446 447
448 449
450 451
452 453
454 455
456 457
458 459
460 461
462 463
464 465
466 467
468 469
470 471
472 473
474 475
476 477
478 479
480 481
482 483
484 485
486 487
488 489
490 491
492 493
494 495
496 497
498 499
500 501
502 503
504 505
506 507
508 509
510 511
512 513
514 515
516 517
518 519
520 521
522 523
524 525
526 527
528 529
530 531
532 533
534 535
536 537
538 539
540 541
542 543
544 545
546 547
548 549
550 551
552 553
554 555
556 557
558 559
560 561
562 563
564 565
566 567
568 569
570 571
572 573
574 575
576 577
578 579
580 581
582 583
584 585
586 587
588 589
590 591
592 593
594 595
596 597
598 599
600 601
602 603
604 605
606 607
608 609
610 611
612 613
614 615
616 617
618 619
620 621
622 623
624 625
626 627
628 629
630 631
632 633
634 635
636 637
638 639
640 641
642 643
644 645
646 647
648 649
650 651
652 653
654 655
656 657
658 659
660 661
662 663
664 665
666 667
668 669
670 671
672 673
674 675
676 677
678 679
680 681
682 683
684 685
686 687
688 689
690 691
692 693
694 695
696 697
698 699
700 701
702 703
704 705
706 707
708 709
710 711
712 713
714 715
716 717
718 719
720 721
722 723
724 725
726 727
728 729
730 731
732 733
734 735
736 737
738 739
740 741
742 743
744 745
746 747
748 749
750 751
752 753
754 755
756 757
758 759
760 761
762 763
764 765
766 767
768 769
770 771
772 773
774 775
776 777
778 779
780 781
782 783
784 785
786 787
788 789
790 791
792 793
794 795
796 797
798 799
800 801
802 803
804 805
806 807
808 809
810 811
812 813
814 815
816 817
818 819
820 821
822 823
824 825
826 827
828 829
830 831
832 833
834 835
836 837
838 839
840 841
842 843
844 845
846 847
848 849
850 851
852 853
854 855
856 857
858 859
860 861
862 863
864 865
866 867
868 869
870 871
872 873
874 875
876 877
878 879
880 881
882 883
884 885
886 887
888 889
890 891
892 893
894 895
896 897
898 899
900 901
902 903
904 905
906 907
908 909
910 911
912 913
914 915
916 917
918 919
920 921
922 923
924 925
926 927
928 929
930 931
932 933
934 935
936 937
938 939
940 941
942 943
944 945
946 947
948 949
950 951
952 953
954 955
956 957
958 959
960 961
962 963
964 965
966 967
968 969
970 971
972 973
974 975
976 977
978 979
980 981
982 983
984 985
986 987
988 989
990 991
992 993
994 995
996 997
998 999
1000 1001
1002 1003
1004 1005
1006 1007
1008 1009
1010 1011
1012 1013
1014 1015
1016 1017
1018 1019
1020 1021
1022 1023
1024 1025
1026 1027
1028 1029
1030 1031
1032 1033
1034 1035
1036 1037
1038 1039
1040 1041
1042 1043
1044 1045
1046 1047
1048 1049
1050 1051
1052 1053
1054 1055
1056 1057
1058 1059
1060 1061
1062 1063
1064 1065
1066 1067
1068 1069
1070 1071
1072 1073
1074 1075
1076 1077
1078 1079
1080 1081
1082 1083
1084 1085
1086 1087
1088 1089
1090 1091
1092 1093
1094 1095
1096 1097
1098 1099
1100 1101
1102 1103
1104 1105
1106 1107
1108 1109
1110 1111
1112 1113
1114 1115
1116 1117
1118 1119
1120 1121
1122 1123
1124 1125
1126 1127
1128 1129
1130 1131
1132 1133
1134 1135
1136 1137
1138 1139
1140 1141
1142 1143
1144 1145
1146 1147
1148 1149
1150 1151
1152 1153
1154 1155
1156 1157
1158 1159
1160 1161
1162 1163
1164 1165
1166 1167
1168 1169
1170 1171
1172 1173
1174 1175
1176 1177
1178 1179
1180 1181
1182 1183
1184 1185
1186 1187
1188 1189
1190 1191
1192 1193
1194 1195
1196 1197
1198 1199
1199 1200
1200 1201
1202 1203
1204 1205
1206 1207
1208 1209
1210 1211
1212 1213
1214 1215
1216 1217
1218 1219
1220 1221
1222 1223
1224 1225
1226 1227
1228 1229
1230 1231
1232 1233
1234 1235
1236 1237
1238 1239
1240 1241
1242 1243
1244 1245
1246 1247
1248 1249
1250 1251
1252 1253
1254 1255
1256 1257
1258 1259
1260 1261
1262 1263
1264 1265
1266 1267
1268 1269
1270 1271
1272 1273
1274 1275
1276 1277
1278 1279
1280 1281
1282 1283
1284 1285
1286 1287
1288 1289
1290 1291
1292 1293
1294 1295
1296 1297
1298 1299
1299 1300
1300 1301
1302 1303
1304 1305
1306 1307
1308 1309
1310 1311
1312 1313
1314 1315
1316 1317
1318 1319
1320 1321
1322 1323
1324 1325
1326 1327
1328 1329
1330 1331
1332 1333
1334 1335
1336 1337
1338 1339
1340 1341
1342 1343
1344 1345
1346 1347
1348 1349
1350 1351
1352 1353
1354 1355
1356 1357
1358 1359
1360 1361
1362 1363
1364 1365
1366 1367
1368 1369
1370 1371
1372 1373
1374 1375
1376 1377
1378 1379
1380 1381
1382 1383
1384 1385
1386 1387
1388 1389
1390 1391
1392 1393
1394 1395
1396 1397
1398 1399
1399 1400
1400 1401
1402 1403
1404 1405
1406 1407
1408 1409
1410 1411
1412 1413
1414 1415
1416 1417
1418 1419
1420 1421
1422 1423
1424 1425
1426 1427
1428 1429
1430 1431
1432 1433
1434 1435
1436 1437
1438 1439
1440 1441
1442 1443
1444 1445
1446 1447
1448 1449
1450 1451
1452 1453
1454 1455
1456 1457
1458 1459
1460 1461
1462 1463
1464 1465
1466 1467
1468 1469
1470 1471
1472 1473
1474 1475
1476 1477
1478 1479
1480 1481
1482 1483
1484 1485
1486 1487
1488 1489
1490 1491
1492 1493
1494 1495
1496 1497
1498 1499
1499 1500
1500 1501
1502 1503
1504 1505
1506 1507
1508 1509
1510 1511
1512 1513
1514 1515
1516 1517
1518 1519
1520 1521
1522 1523
1524 1525
1526 1527
1528 1529
1530 1531
1532 1533
1534 1535
1536 1537
1538 1539
1540 1541
1542 1543
1544 1545
1546 1547
1548 1549
1550 1551
1552 1553
1554 1555
1556 1557
1558 1559
1560 1561
1562 1563
1564 1565
1566 1567
1568 1569
1570 1571
1572 1573
1574 1575
1576 1577
1578 1579
1580 1581
1582 1583
1584 1585
1586 1587
1588 1589
1590 1591
1592 1593
1594 1595
1596 1597
1598 1599
1599 1600
1600 1601
1602 1603
1604 1605
1606 1607
1608 1609
1610 1611
1612 1613
1614 1615
1616 1617
1618 1619
1620 1621
1622 1623
1624 1625
1626 1627
1628 1629
1630 1631
1632 1633
1634 1635
1636 1637
1638 1639
1640 1641
1642 1643
1644 1645
1646 1647
1648 1649
1650 1651
1652 1653
1654 1655
1656 1657
1658 1659
1660 1661
1662 1663
1664 1665
1666 1667
1668 1669
1670 1671
1672 1673
1674 1675
1676 1677
1678 1679
1680 1681
1682 1683
1684 1685
1686 1687
1688 1689
1690 1691
1692 1693
1694 1695
1696 1697
1698 1699
1699 1700
1700 1701
1702 1703
1704 1705
1706 1707
1708 1709
1710 1711
1712 1713
1714 1715
1716 1717
1718 1719
1720 1721
1722 1723
1724 1725
1726 1727
1728 1729
1730 1731
1732 1733
1734 1735
1736 1737
1738 1739
1740 1741
1742 1743
1744 1745
1746 1747
1748 1749
1750 1751
1752 1753
1754 1755
1756 1757
1758 1759
1760 1761
1762 1763
1764 1765
1766 1767
1768 1769
1770 1771
1772 1773
1774 1775
1776 1777
1778 1779
1780 1781
1782 1783
1784 1785
1786 1787
1788 1789
1790 1791
1792 1793
1794 1795
1796 1797
1798 1799
1799 1800
1800 1801
1802 1803
1804 1805
1806 1807
1808 1809
1810 1811
1812 1813
1814 1815
1816 1817
1818 1819
1820 1821
1822 1823
1824 1825
1826 1827
1828 1829
1830 1831
1832 1833
1834 1835
1836 1837
1838 1839
1840 1841
1842 1843
1844 1845
1846 1847
1848 1849
1850 1851
1852 1853
1854 1855
1856 1857
1858 1859
1860 1861
1862 1863
1864 1865
1866 1867
1868 1869
1870 1871
1872 1873
1874 1875
1876 1877
1878 1879
1880 1881
1882 1883
1884 1885
1886 1887
1888 1889
1890 1891
1892 1893
1894 1895
1896 1897
1898 1899
1899 1900
1900 1901
1902 1903
1904 1905
1906 1907
1908 1909
1910 1911
1912 1913
1914 1915
1916 1917
1918 1919
1920 1921
1922 1923
1924 1925
1926 1927
1928 1929
1930 1931
1932 1933
1934 1935
1936 1937
1938 1939
1940 1941
1942 1943
1944 1945
1946 1947
1948 1949
1950 1951
1952 1953
1954 1955
1956 1957
1958 1959
1960 1961
1962 1963
1964 1965
1966 1967
1968 1969
1970 1971
1972 1973
1974 1975
1976 1977
1978 1979
1980 1981
1982 1983
1984 1985
1986 1987
1988 1989
1990 1991
1992 1993
1994 1995
1996 1997
1998 1999
1999 2000
2000 2001
2002 2003
2004 2005
2006 2007
2008 2009
2010 2011
2012 2013
2014 2015
2016 2017
2018 2019
2020 2021
2022 2023
2024 2025
2026 2027
2028 2029
2030 2031
2032 2033
2034 2035
2036 2037
2038 2039
2040 2041
2042 2043
2044 2045
2046 2047
2048 2049
2050 2051
2052 2053
2054 2055
2056 2057
2058 2059
2060 2061
2062 2063
2064 2065
2066 2067
2068 2069
2070 2071
2072 2073
2074 2075
2076 2077
2078 2079
2080 2081
2082 2083
2084 2085
2086 2087
2088 2089
2090 2091
2092 2093
2094 2095
2096 2097
2098 2099
2099 2100
2100 2101
2102 2103
2104 2105
2106 2107
2108 2109
2110 2111
2112 2113
2114 2115
2116 2117
2118 2119
2120 2121
2122 2123
2124 2125
2126 2127
2128 2129
2130 2131
2132 2133
2134 2135
2136 2137
2138 2139
2140 2141
2142 2143
2144 2145
2146 2147
2148 2149
2150 2151
2152 2153
2154 2155
2156 2157
2158 2159
2160 2161
2162 2163
2164 2165
2166 2167
2168 2169
2170 2171
2172 2173
2174 2175
2176 2177
2178 2179
2180 2181
2182 2183
2184 2185
2186 2187
2188 2189
2190 2191
2192 2193
2194 2195
2196 2197
2198 2199
2199 2200
2200 2201
2202 2203
2204 2205
2206 2207
2208 2209
2210 2211
2212 2213
2214 2215
2216 2217
2218 2219
2220 2221
2222 2223
2224 2225
2226 2227
2228 2229
2230 2231
2232 2233
2234 2235
2236 2237
2238 2239
2240 2241
2242 2243
2244 2245
2246 2247
2248 2249
2250 2251
2252 2253
2254 2255
2256 2257
2258 2259
2260 2261
2262 2263
2264 2265
2266 2267
2268 2269
2270 2271
2272 2273
2274 2275
2276 2277
2278 2279
2280 2281
2282 2283
2284 2285
2286 2287
2288 2289
2290 2291
2292 2293
2294 2295
2296 2297
2298 2299
2299 2300
2300 2301
2302 2303
2304 2305
2306 2307
2308 2309
2310 2311
2312 2313
2314 2315
2316 2317
2318 2319
2320 2321
2322 2323
2324 2325
2326 2327
2328 2329
2330 2331
2332 2333
2334 2335
2336 2337
2338 2339
2340 2341
2342 2343
2344 2345
2346 2347
2348 2349
2350 2351
2352 2353
2354 2355
2356 2357
2358 2359
2360 2361
2362 2363
2364 2365
2366 2367
2368 2369
2370 2371
2372 2373
2374 2375
2376 2377
2378 2379
2380 2381
2382 2383
2384 2385
2386 2387
2388 2389
2390 2391
2392 2393
2394 2395
2396 2397
2398 239

Summary of the Invention

The invention addresses these and other problems associated with the prior art by providing an apparatus, program product and method in which voice recognition is performed on voice messages in an automated manner to detect spoken numbers

5 contained therein.

Specifically, consistent with one aspect of the invention, voice recognition is performed on at least a portion of a voice representation of a voice message to generate a textual representation of the voice message, and a position of a spoken number in the textual representation of the voice message is detected. Based upon the position of the spoken number, a playback start position is determined, and the voice message is played back starting at the playback start position. As such, a user is typically capable of quickly and efficiently accessing spoken numbers in a voice message in a more automated manner, thus minimizing the amount of time the user spends in trying to locate the numbers through conventional manual operations.

15 In addition to or in lieu of determining a position to play a voice message back based upon the position of a spoken number, automated number detection may also be utilized to automatically dial a detected spoken number. Further, in other embodiments, a user may also be permitted to view a text representation of a voice message incorporating a detected spoken number. In all such instances, many of the aforementioned difficulties associated with determining and utilizing the numbers spoken in voice messages are significantly reduced.

These and other advantages and features, which characterize the invention, are set forth in the claims annexed hereto and forming a further part hereof. However, for a better understanding of the invention, and of the advantages and objectives attained through its use, reference should be made to the Drawings, and to the accompanying descriptive matter, in which there is described exemplary embodiments of the invention.

Brief Description of the Drawings

FIGURE 1 is a block diagram of a communications system consistent with the invention.

FIGURE 2 is a block diagram of an exemplary hardware and software
5 environment for a voice messaging system in the communications system of Fig. 1.

FIGURE 3 is a block diagram of various data structures utilized by the voice messaging system of Fig. 2.

FIGURE 4 is a flowchart illustrating the program flow of a process new voice message routine executed by the voice messaging system of Fig. 2.

10 FIGURE 5 is a flowchart illustrating the program flow of a delete message routine executed by the voice messaging system of Fig. 2.

FIGURE 6 is a flowchart illustrating the program flow of a process playback events routine executed by the voice messaging system of Fig. 2.

15 FIGURE 7 is a flowchart illustrating the program flow of the find previous number routine referenced in Fig. 6.

FIGURE 8 is a flowchart illustrating the program flow of the display text routine referenced in Fig. 6.

FIGURE 9 is a flowchart illustrating the program flow of the dial number routine referenced in Fig. 6.

20

Detailed Description

Hardware and Software Environment

Turning to the Drawings, wherein like numbers denote like parts throughout the several views, Fig. 1 illustrates a communications system 10 incorporating a voice
5 messaging system 12 consistent with the invention. Communications system 10 is illustrated as incorporating a private voice network 14 used to couple a plurality of telephones 16 to one another, as well as to a public network 18 (e.g., local, wireless and/or long distance telephone networks). Private voice network 14 may incorporate various telecommunications functionality, e.g., PBX, as well as video and other
10 multimedia communications capabilities, call center functionality, integrated data communications capabilities, etc. For example, network 14 may be coupled to the Internet or another public data transmission network (represented at 20), e.g., to communicate voice or other information across over such public networks.

Voice messaging system 12 is illustrated as interfacing with network 14 to
15 provide voice messaging capability thereto. As a component of such capability, voice messaging system 12 incorporates automated number detection consistent with the invention. To this extent, voice messaging system 12 is illustrated as interfacing with a message database 22 suitable for storing voice, text and other data related to automated number detection, and with a voice recognition engine 24.

20 While voice messaging system 12 is shown as a separate system that interfaces with private voice network 14, in the alternative, voice messaging system 12 may be integrated directly into private voice network 14. In addition, in other environments voice messaging system 12 may be incorporated into a public network, e.g., as part of voice messaging services supplied by a telecom provider. Also, in other
25 environments, voice messaging system 12 may be integrated into a separate stand-alone component such as an answering machine or a telephone incorporating voice messaging functionality. It will therefore be appreciated that the environment of Fig. 1 is shown merely for illustrative purposes, and that automated number detection can be implemented into practically any data processing environment in which it is
30 desirable to detect spoken numbers in a voice message.

Fig. 2 illustrates in another way an exemplary hardware and software environment for an apparatus 30 incorporating automated number detection consistent with the invention. For the purposes of the invention, apparatus 30 may represent practically any type of computer, computer system, telephone, answering machine or other programmable electronic device incorporating voice communications capabilities.

Apparatus 30 typically includes at least one processor 31 coupled to a memory 32. Processor 31 may represent one or more processors (e.g., microprocessors), and memory 32 may represent the random access memory (RAM) devices comprising the main storage of the apparatus, as well as any supplemental levels of memory, e.g., cache memories, non-volatile or backup memories (e.g., programmable or flash memories), read-only memories, etc. In addition, memory 32 may be considered to include memory storage physically located elsewhere in apparatus 30, e.g., any cache memory in a processor 31, as well as any storage capacity used as a virtual memory, e.g., as stored on a mass storage device 35 or on another data processing system coupled to apparatus 30 via an external network (e.g., telephone network 36).

Apparatus 30 also typically receives a number of inputs and outputs for communicating information externally. For interaction with one or more end users, apparatus 30 typically interfaces with one or more user telephones 33. In addition, for multi-user systems, apparatus 30 may have a supplemental operator interface 34 to enable configuration, programming, and maintenance operations to be performed on the apparatus. For additional storage, apparatus 30 may also include one or more mass storage devices 35, e.g., a floppy or other removable disk drive, a hard disk drive, a direct access storage device (DASD), an optical drive (e.g., a CD drive, a DVD drive, etc.), and/or a tape drive, among others. Furthermore, apparatus 30 is typically interfaced with an external telecommunications network 36. It should be appreciated that apparatus 30 typically includes suitable analog and/or digital interfaces between processor 31 and each of components 32, 33, 34, 35 and 36 as is well known in the art.

Apparatus 30 operates under the control of an operating system 40, and executes or otherwise relies upon various computer software applications,

components, programs, objects, modules, data structures, etc. (e.g., voice messaging application 42, voice recognition engine 44, message header table 46, voice storage 48, text messages 50 and message map tables 52, among others). Moreover, various applications, components, programs, objects, modules, etc. may also execute on one or more processors in another computer coupled to apparatus 30 via an external network, e.g., in a distributed or client-server computing environment, whereby the processing required to implement the functions of a computer program may be allocated to multiple computers over a network.

In general, the routines executed to implement the embodiments of the invention, whether implemented as part of an operating system or a specific application, component, program, object, module or sequence of instructions will be referred to herein as "computer programs", or simply "programs". The computer programs typically comprise one or more instructions that are resident at various times in various memory and storage devices in a computer, and that, when read and executed by one or more processors in a computer, cause that computer to perform the steps necessary to execute steps or elements embodying the various aspects of the invention. Moreover, while the invention has and hereinafter will be described in the context of fully functioning computers and data processing systems, those skilled in the art will appreciate that the various embodiments of the invention are capable of being distributed as a program product in a variety of forms, and that the invention applies equally regardless of the particular type of signal bearing media used to actually carry out the distribution. Examples of signal bearing media include but are not limited to recordable type media such as volatile and non-volatile memory devices, floppy and other removable disks, hard disk drives, magnetic tape, optical disks (e.g., CD-ROM's, DVD's, etc.), among others, and transmission type media such as digital and analog communication links.

In addition, various programs described hereinafter may be identified based upon the application for which they are implemented in a specific embodiment of the invention. However, it should be appreciated that any particular program nomenclature that follows is used merely for convenience, and thus the invention

should not be limited to use solely in any specific application identified and/or implied by such nomenclature.

Those skilled in the art will recognize that the exemplary environments illustrated in Figs. 1 and 2 are not intended to limit the present invention. Indeed, those skilled in the art will recognize that other alternative hardware and/or software environments may be used without departing from the scope of the invention.

Automated Number Detection

The embodiments described hereinafter generally incorporate automated number detection in a voice messaging system to assist users of the system in locating and using spoken numbers contained within voice messages. To implement this functionality, a number of data structures are utilized. One implementation of such data structures is illustrated in Fig. 3. As shown in this figure, a message header table 46 incorporates a plurality of message header records 60 arranged into a linked list, with each record including a plurality of fields 62-70 used to store the necessary information for a particular voice message. Each message header provides a set of pointers linking a voice representation of a voice message, a text representation of the same, and a map table to one another. Specifically, field 62 includes a message identifier from which each message header can be uniquely identified. Field 64 provides a pointer in a voice storage 48 to the start of an audio clip or file 71 functioning as the voice representation of the voice message. A separate voice storage position variable 72 is utilized to point to the end of a last (most recently stored) audio file in voice storage 48. Variable 72 in particular is utilized to point to a position in the voice storage to which new messages should be added.

Returning to message header 60, a text message pointer 66 points to a text message record 50 providing a textual representation of the voice message. Record 50 is illustrated as a two column table including a plurality of entries 74, each having an index field 76 and a text field 78. Each entry 74 identifies a separate word or phrase in the voice message, with the index field providing a unique index therefor.

Returning to message header 60, field 68 provides a pointer to a message map table 52 having a plurality of entries 80, each including a voice index field 82, a text

index field 84 and a numeric indicator 86. Voice index field 82 for each entry identifies the position in voice storage 48 of the start of a word or phrase in the voice representation of the voice message. Text index field 84 likewise identifies the index for the same word or phrase in text message record 50. Numeric indicator field 86 identifies whether or not the word or phrase represents a number.

Returning once again to message header 60, field 70 includes the next message pointer that points to a next message header in the linked list 46. The last message header includes a null value in field 70.

Another data structure utilized by a voice messaging system is that of a current position variable 90. Variable 90 includes two fields, a current message field 92 that points to a message header for a current message being processed by the voice messaging system, and a voice position field 94 that stores a current position in the voice representation of the current message in the voice storage. It will be appreciated that during playback, the voice position field is continuously updated as a voice representation is being output to the user, so that the voice position is consistent with the position in the audio clip to that listened to by a user.

To illustrate the interaction between the various data structures utilized in apparatus 30, an exemplary voice message is shown in Fig. 3, containing the message:

"This is Steve Johnson. You may call me at 555-123-4567. We will be meeting a Wong's. Hope to see you there."

A voice or audio representation of the exemplary voice message is shown stored in voice storage 48 in an audio file 71. For ease of understanding, the message is partitioned into three segments, designated A, B and C, with region B including a spoken number, and regions A and C containing other information. The individual words within each region are separately identified using numerical designations, such that the individual words in region A are identified at A1-A9. Each text message record 50 utilizes separate indices for each text word in the textual representation of the voice message, with the text indices denoted with a prime designation.

As such, it may be seen that each entry 80 within message map table 52 maps a voice index to a text index for each word in the spoken message. In addition, for each such word, a numeric indicator is provided to indicate whether the word represents a spoken number or digit thereof. Consequently, for the words within region B, the numeric indicator for each associated map table entry is set, while those for the words in regions A and C, are not set.

It should be noted that the designations herein of the different regions and words within each of these regions are made merely for the purposes of illustration. The index values used to identify specific points in the voice and textual representations of the voice message can take any number of forms consistent with the invention. Moreover, alternate data structures may be utilized for each of voice storage 48, text message record 50, message map table 52 and message header table 46 consistent with the invention. For example, regions of numeric and non-numeric information may be separately identified, without specific index values utilized for each word contained therein. Moreover, rather than utilizing a unified voice storage, separate voice records may be utilized to store the various voice representations of the voice messages. Likewise, any of the textual and mapping information may be combined into a unified storage as desired. Further, no separate index field need be provided in text message record 50, and the functionality of record 50 and map table 52 may be combined into a single data structure if desired. Other modifications will be apparent to those of ordinary skill in the art.

To implement automated number detection in a voice messaging system, a number of computer operations may be supported, e.g., within voice messaging application 42 in apparatus 30. Figs. 4 and 5, for example, illustrate the operations that occur in processing new voice messages and deleting existing voice messages. Moreover, Figs. 6-9 illustrate the operations that may be performed during playback of a voice message to a recipient. It will be appreciated that the general operation of a voice messaging system in processing new voice messages, deleting existing messages, and handling the playback of a voice message and user input received during such playback are all operations that are well known in the voice messaging art. As such, the discussion hereinafter will focus on the enhancements to these

operations to support automated number detection consistent with the invention. Additional functionality supported by known voice messaging systems may also be incorporated into a voice messaging system consistent with the invention; however, a separate discussion of such additional functionality need not be provided herein.

Fig. 4 illustrates a process new voice message routine 100 that is called by voice messaging application 42 responsive to receipt of a new voice message. Routine 100 begins in block 102 by storing a digitized voice representation of the message in the voice storage (VS) at the current voice storage position pointed to by variable 72 (Fig. 3). Typically, such storage occurs after the last voice message stored in the voice storage. In some instances, however, voice messages may be removed from storage, or the total amount of storage may be full, whereby the voice storage position may point to another position within the voice storage.

Next, in block 104, the voice storage position variable 72 is set to point to the end of the new voice representation that has been stored in the voice storage. As such, future voice files added for the user will be stored beginning at the end of the voice representation stored during this iteration of routine 100.

Next, in block 106, voice recognition is performed on the new digitized voice representation using voice recognition engine 44 to generate a text representation of the message for storage in a new text message record. In performing voice recognition, any number of commercial or proprietary voice recognition engine designs and algorithms may be utilized, e.g., the Via Voice voice recognition engine available from International Business Machines Corporation, the Naturally Speaking voice recognition engine available from Dragon Systems, Inc., and others. It will be appreciated that the operations associated with performing voice recognition to generate a text string from a voice file are well known in the art, and thus need not be discussed in further detail herein.

The text string output by the voice recognition engine is subsequently processed to generate a text message record 50, having the format shown in Fig. 3. Specifically, each word in the text string is parsed and placed into a separate entry, with a unique index value associated with each such word. In the alternative, multiple words may be coupled into phrases if desired.

Next, in block 108, a new message map table is created using the voice and text message data, to generate a table having the format shown in Fig. 3. Specifically, the start locations of each word in the voice representations of the message are mapped to the index values within the text message record such that either of the index values for the voice or text representations of the message can be utilized to generate the location of the corresponding word in the other representation.

In addition, in block 108, the numeric indicator is set for each map table entry as appropriate. Typically, this is performed by processing text message record 50 to identify any words within the text message that correspond to numeric formats. For example, a simple string search may be utilized to search for specific numeric strings. In addition, in some implementations the voice recognition engine may directly generate a numeric value as the text representation of a spoken number. It should also be appreciated that either the voice recognition engine or the logic in block 108 may also be configured to handle known variations on spoken numbers, e.g., so that the phrase "fifty-three-hundred" will be translated to the digits "5300". It should also be appreciated that determining the numeric status of a particular word within a text string is well within the abilities of one of ordinary skill in the art having the benefit of the instant disclosure.

Next, once a new message map table has been created, a new message header is created in block 110, and added to the message header table. Typically, this is performed by allocating new storage for the message header, storing the pointers to the location in voice storage, the text message and the message map table associated with the message, adding a new identifier that uniquely identifies the message header, and then storing a pointer to the new message header in field 70 of the former last message header in the linked list. Once the new message header has been added to the message header table, routine 100 is complete.

Fig. 5 next illustrates a delete message routine 120 that is called in response to a user request to delete a message from the system (or alternatively if the message is automatically deleted after a certain time frame). Such a routine may be called, for example, during playback of a message, or after playback of a message is complete.

Routine 120 begins in block 122 by deleting the message header, text message record and message map table pointed to by the current position variable 90 (Fig. 3). As a component of deleting the message header, the next message pointer for the previous message header record (if any) in the table is updated as appropriate. Also, if the deleted message record was first in the list, the pointer to the head of the list is updated.

Next, in block 124, the memory in the voice storage associated with the voice message is freed, or de-allocated. Next, beginning in block 126, the current position variable is updated to point to the start of another message header in the table. In block 126, it is determined whether another message header is prior to the deleted message header in the message header table. If so, control passes to block 128 to set the current position variable to point to the previous message header in field 92, as well as to store the starting location of the voice representation therefor in field 94 (which is stored in field 64 of such message header). Routine 120 is then complete.

If there is no previous message header, control passes from block 126 to block 130 to determine whether a next message header is present in the table. If so, control passes to block 132 to set the current position variable 90 to point to the next message header in the table in field 92. In addition, field 94 of the current position variable is updated to point to the start of the voice representation for the message, stored in field 64 of the next message header. Routine 120 is then complete.

Returning to block 130, if there is no next message header, control passes to block 134 to initialize the current position to *null*, as no message headers remain in table 46.

Fig. 6 next illustrates a process playback events routine 140 that is utilized to process any user input that occurs during or after playback of a particular voice message. A number of events are detected in blocks 142-160, and handled in the manner discussed below. Additional events, which are not relevant to an understanding of the invention, may also be processed in block 162. Routine 140 is typically called in response to receipt of user input that generates an event during playback of a voice message, or alternatively, after playback of a voice message is complete. The functionality of the various events processed by routine 140 may also

be implemented in other areas of the voice messaging system. Moreover, programming models other than an event-driven model may be used in the alternative.

One event that may be handled by routine 140 is a go to top of previous message event, which is detected in block 142 and handled in block 164 by setting the current position variable to point to the previous message header, with field 94 thereof pointing to the start of the voice representation retrieved from field 64 of such message header (Fig. 3). It should be appreciated that if the current message is the first message in the voice storage, an exception may be signaled to notify the user that the first message is currently being processed.

Another event that may be handled in routine 140 is a go to top of all messages event, which is detected in block 144 and handled in block 166 by setting the current position to point to the first message header, as well as to the start of the voice representation associated therewith.

Blocks 146 and 148 respectively detect go to top of next message and go to top of last message events that are respectively handled in blocks 168 and 170 by setting the current position to point to the next (or last) message header, and at the start of the voice representation associated therewith.

Blocks 150 and 152 respectively detect go back n seconds and go forward n seconds events that skip forward or back in the current voice message by a predetermined number of seconds. These events are respectively handled in blocks 172 and 174 to either back up or forward the current voice position (field 94 of current position variable 90) a predetermined number of seconds. Blocks 172 and 174 may also include functionality to jump to a previous or next message if the fast forward or rewind operation spans into another message. In the alternative, a user may be required to specifically request another message rather than skipping directly between messages as disclosed herein.

Block 154 detects a go to previous number event, which is handled by calling a find previous number routine 176, which implements automated number detection consistent with the invention to initiate playback at the immediately preceding spoken number from the current position. Block 156 detects a go to next number event,

which calls a find next number routine 178 to perform a complementary operation to automatically detect the position of a next spoken number from the current position.

Block 158 detects a display text message event, which is handled by a display text routine 180. A dial number event is detected in block 160 and handled by a dial number routine 182. The operations associated with handling these latter events will
5 be discussed in greater detail below.

Fig. 7 illustrates find previous number routine 176 in greater detail. Routine 176 begins in block 190 by getting the current message header and voice position from the current position variable 90. Next, block 192 searches for a previous spoken
10 number by scanning backwards in the message map table of the current message header, starting from the entry having a voice index closest to the current voice position. Typically, this is performed by searching through previous table entries to find one or more entries having the numeric indicators set therefor.

In addition, in this block it may be desirable to confirm whether a sequence of
15 entries having numeric indicators set therefor constitutes a likely telephone number. For example, it may be desirable to determine whether a sequence of entries define a number having more than a predetermined number of digits, e.g., to distinguish telephone numbers from other spoken numbers in a message such as "I'll see you at five o'clock". In many instances, it may be desirable to require at least four spoken
20 digits to be detected, so that extension numbers can be detected. In other instances, it may be sufficient to require seven or more spoken digits, particularly if the type of voice communications environment does not support the use of extensions.

Next, in block 194, it is determined whether a spoken number has been found in the message map table for the current message header. If so, the current voice
25 position field in the current position variable is set to the start of the located number in block 196 -- typically by using the voice index for the first (leading) entry in a sequence of entries having set numeric indicators. Next, in block 198, the voice position is optionally backed up several seconds to provide a contextual framework from which it is easier for the listener to determine whether a telephone number is
30 being conveyed in the message. Next, in block 199, playback may optionally be explicitly restarted at the new voice position. In the alternative, separate input may be

required to restart playback, or the playback may be inherently restarted as a result of routine 176. Routine 176 is then complete.

Returning to block 194, if no number is found in the current message header, control passes to block 200 to determine whether the current message header is the first message header in the message header table. If not, control passes to block 202 to update the current position variable to point to the previous message header, with the voice position set to the end of the voice representation associated with such previous message header. Control then returns to block 192 to search backwards in the new message header to locate a spoken number therein. Returning to block 200, if the current message header is the first message header in the table, control passes to block 204 to signal an exception that no number has been found. Then, dedicated exception handling program code can notify the user, for example, that no spoken numbers precede the current position. In the alternative, rather than spanning into previous messages, block 194 may simply pass control to block 204 to signify to the listener that no spoken numbers precede the current position in the current message.

It will be appreciated that find next number routine 178 referenced in Fig. 6 operates in essentially the same manner as routine 176, with the exception that the operation corresponding to block 192 of routine 176 would search forward in the message map table of the current message to locate a spoken number. In addition, in the blocks corresponding to blocks 200 and 202 of routine 176, it would be determined whether a current message header is last in the message header table, and if not, to update the current position to point to the next message header, and to the start of the voice representation associated therewith. In addition, any notification to the user that no number is found may be similarly modified.

Fig. 8 next illustrates a display text routine 180 that may be initiated, for example, in response to a listener's desire to view a text representation of a portion of a message. Routine 180 starts in block 210 by displaying a text representation for the current message to the user. The format of such text representation may vary substantially depending upon the type of display within which the text is displayed. For example, for a telephone-based display, only a limited amount of display space may be provided, and the request to display text may display only a short segment of

the message. In addition, only the current spoken number may be displayed, or other text in the message may be displayed as desired. For a computer-based display, e.g., in a text or graphical user interface environment, a greater portion of the text representation may be displayed, with greater user interaction permitted.

5 Next, in block 212, it may also be desirable to allow a user to interact with a text representation through any number of operations. For example, a user may be permitted to scroll within a text representation to locate a cursor at a specific number or other position in the message. A user may also be permitted to change the current playback position based upon the position of a cursor in the display. A user may also
10 be permitted to dial a number located at a current cursor position. Furthermore, a user may be permitted to end the display of the text through separate user input.

Typically, block 212 will terminate when a user has selected an action that terminates interaction with the text, e.g., a request to end the display, a request to dial a number, or through other actions such as picking up the telephone handset to make a
15 call. Other operations will be apparent to one of ordinary skill in the art.

Fig. 9 next illustrates a dial number routine 182, which may be initiated, for example, in response to a user request through a telephone handset, or through user interaction with displayed text, if desired. Routine 182 begins in block 220 by determining whether the current position is located at a spoken number. Block 220
20 may be implemented, for example, by detecting whether the current position maps to an entry in the message map table that is within a spoken number. As with block 192 of routine 176, it may also be desirable to determine whether the spoken number corresponds to a valid telephone number, using any of the number of techniques described above in connection with block 192.

25 Next, if the current position is located at a spoken number, control passes to block 222 to select the digits from the text representation of the current message at the current position using the message map table. Typically, this is implemented by selecting the entry in the message map table corresponding to the current position, finding the first and last entries in the message map table from the current position
30 having set numeric indicators, and then using the text indices in each of the entries to retrieve the corresponding text representations from the text message record.

Next, in block 224, it is determined whether the digits form a valid telephone number. As discussed above, this operation may include determining whether the sequence of digits includes at least a minimum number of digits. Additional functionality may also be incorporated, for example, to determine whether a number of digits equals a number format recognized by the voice communication system, as well as utilizing telephone directory services to determine whether a valid number exists.

If a valid telephone number is detected, block 224 passes control to block 226 to dial the selected digits. Block 226 may be implemented using any number of auto-dialing services supported in most voice communication systems. Moreover, block 226 may incorporate the dialing of prefix codes such as those codes required to initiate an outside line, international or long distance dialing codes, area codes, etc. Once block 226 has dialed the appropriate digits, routing 182 is then complete.

Returning to block 220, if it is determined that the current position is not located at a spoken number, control passes to block 228 to signal an exception and notify the user that no number exists at the current position. Moreover, returning to block 224, if the digits are determined to not form a valid telephone number, an exception is signaled in block 230 to notify the user that the digits do not form a valid telephone number.

Routine 182 may also incorporate additional functionality, such as providing a confirmation capability prior to actually dialing the number. Any number of voice synthesis technologies can be incorporated, for example, to convey to the user the number that was selected, then requiring a user to depress a key on the telephone handset to initiate dialing of the number. Other additional functionality will be apparent to one of ordinary skill in the art having benefit of the instant disclosure.

Various modifications may be made to the illustrated embodiments without departing from the spirit and scope of the invention. For example, rather than positioning the current position at the first digit in a sequence of digits in response to a request to find a spoken number, the current position may be updated to point to another digit in the sequence, including the last. In addition, the text display function may also incorporate additional functionality, such as identifying and scanning for

proper names or other specific text in a voice message. In addition, in the dial number routine, it may be desirable to provide user feedback by displaying the text representation of the dialed number to the user, e.g., in a telephone display.

Other modifications will become apparent to one of ordinary skill in the art.

- 5 Therefore, the invention lies in the claims hereinafter appended.

110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200

What is claimed is:

- 1 2. A method of processing a voice message, the method comprising:
 - 2 (a) performing voice recognition on at least a portion of the voice
 - 3 message to generate a textual representation of the voice message;
 - 4 (b) detecting a position of a spoken number in the textual
 - 5 representation of the voice message;
 - 6 (c) determining a playback start position based upon the position of
 - 7 the spoken number; and
 - 8 (d) playing the voice message starting at the playback start position.
- 1 2. The method of claim 1, wherein the spoken number includes a plurality of
- 2 spoken digits, and wherein detecting the position of the spoken number includes
- 3 detecting a start position of a leading digit in the plurality of spoken digits.
- 1 3. The method of claim 1, wherein determining the playback start position
- 2 includes setting the playback start position to a position earlier than the position of the
- 3 spoken number.
- 1 4. The method of claim 1, further comprising receiving user input to find a
- 2 previous number from a current playback position in the voice message, wherein
- 3 detecting the position of the spoken number includes detecting an immediately
- 4 preceding spoken number from the current playback position.
- 1 5. The method of claim 1, further comprising receiving user input to find a
- 2 next number from a current playback position in the voice message, wherein detecting
- 3 the position of the spoken number includes detecting an immediately succeeding
- 4 spoken number from the current playback position.
- 1 6. The method of claim 1, further comprising displaying at least a portion of
- 2 the textual representation to a user.

1 8. The method of claim 7, wherein automatically dialing the spoken number is
2 performed in response to user input.

1 9. The method of claim 1, wherein detecting the spoken number includes
2 detecting that the spoken number is a telephone number.

1 10. A method of processing a voice message, the method comprising:
2 (a) performing voice recognition on at least a portion of the voice
3 message to detect a spoken number in the voice message; and
4 (b) automatically dialing the detected spoken number.

1 11. The method of claim 10, wherein automatically dialing the detected
2 spoken number is performed in response to user input.

1 12. The method of claim 10, further comprising determining that the spoken
2 number is a telephone number.

148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200

1 13. An apparatus, comprising:
2 (a) a memory within which is resident a voice message; and
3 (b) a program resident in the memory and configured to perform voice
4 recognition on at least a portion of the voice message to generate a textual
5 representation of the voice message, to detect a position of a spoken number in
6 the textual representation of the voice message, to determine a playback start
7 position based upon the position of the spoken number, and to play the voice
8 message starting at the playback start position.

1 14. The apparatus of claim 13, wherein the spoken number includes a
2 plurality of spoken digits, and wherein the program is configured to detect the
3 position of the spoken number by detecting a start position of a leading digit in the
4 plurality of spoken digits.

1 15. The apparatus of claim 13, wherein the program is configured to
2 determine the playback start position by setting the playback start position to a
3 position earlier than the position of the spoken number.

1 16. The apparatus of claim 13, wherein the program is further configured to
2 receive user input to find a previous number from a current playback position in the
3 voice message, and wherein the program is configured to detect the position of the
4 spoken number by detecting an immediately preceding spoken number from the
5 current playback position.

1 17. The apparatus of claim 13, wherein the program is further configured to
2 receive user input to find a next number from a current playback position in the voice
3 message, and wherein the program is configured to detect the position of the spoken
4 number by detecting an immediately succeeding spoken number from the current
5 playback position.

21. The apparatus of claim 13, wherein the program is configured to detect whether the spoken number is a telephone number.

1 22. An apparatus, comprising:
2 (a) a memory within which is resident a voice message; and
3 (b) a program resident in the memory and configured to perform voice
4 recognition on at least a portion of the voice message to detect a spoken
5 number in the voice message, and to automatically dial the detected spoken
6 number.

1 23. The apparatus of claim 22, wherein the program is configured to
2 automatically dial the spoken number in response to user input.

1 24. The apparatus of claim 22, wherein the program is configured to detect
2 whether the spoken number is a telephone number.

- 1 25. A program product, comprising:
- 2 (a) a program configured to perform voice recognition on at least a
- 3 portion of a voice message to generate a textual representation of the voice
- 4 message, the program further configured to detect a position of a spoken
- 5 number in the textual representation of the voice message, to determine a
- 6 playback start position based upon the position of the spoken number, and to
- 7 play the voice message starting at the playback start position; and
- 8 (b) a signal bearing medium bearing the program.

- 1 26. The program product of claim 25, wherein the signal bearing medium
- 2 includes at least one of a transmission medium and a recordable medium.

- 1 27. A program product, comprising:
- 2 (a) a program configured to perform voice recognition on at least a
- 3 portion of a voice message to detect a spoken number in the voice message,
- 4 and to automatically dial the detected spoken number; and
- 5 (b) a signal bearing medium bearing the program.
- 6

AUTOMATED DETECTION OF SPOKEN NUMBERS IN VOICE MESSAGES

Abstract of the Disclosure

5 An apparatus, program product and method utilize voice recognition to process voice messages in an automated manner to detect spoken numbers contained therein. Detected spoken numbers can then be utilized to set a start position at which to begin playback of a voice message, e.g., to permit a user to locate and transcribe a telephone number spoken by a message sender. Automated number detection may also be utilized to automatically dial telephone numbers mentioned in a voice message, as well as in the display of textual representations of such numbers to a user.

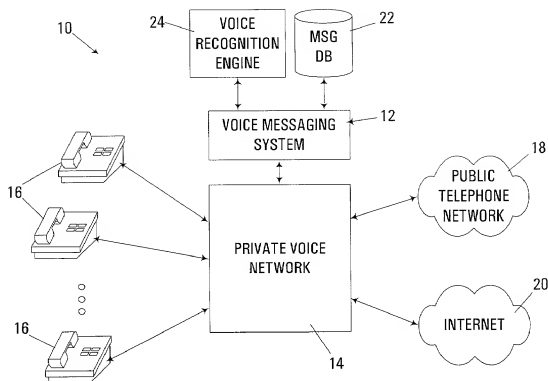


FIG. 1

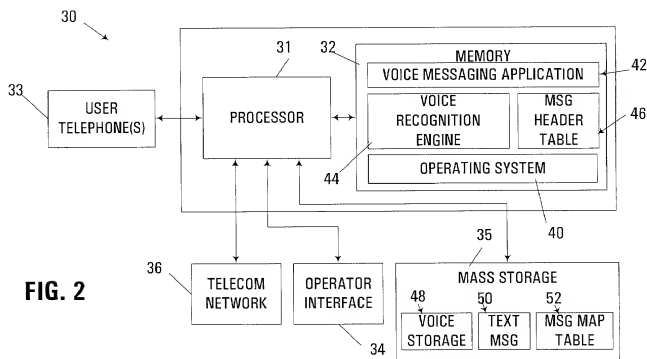
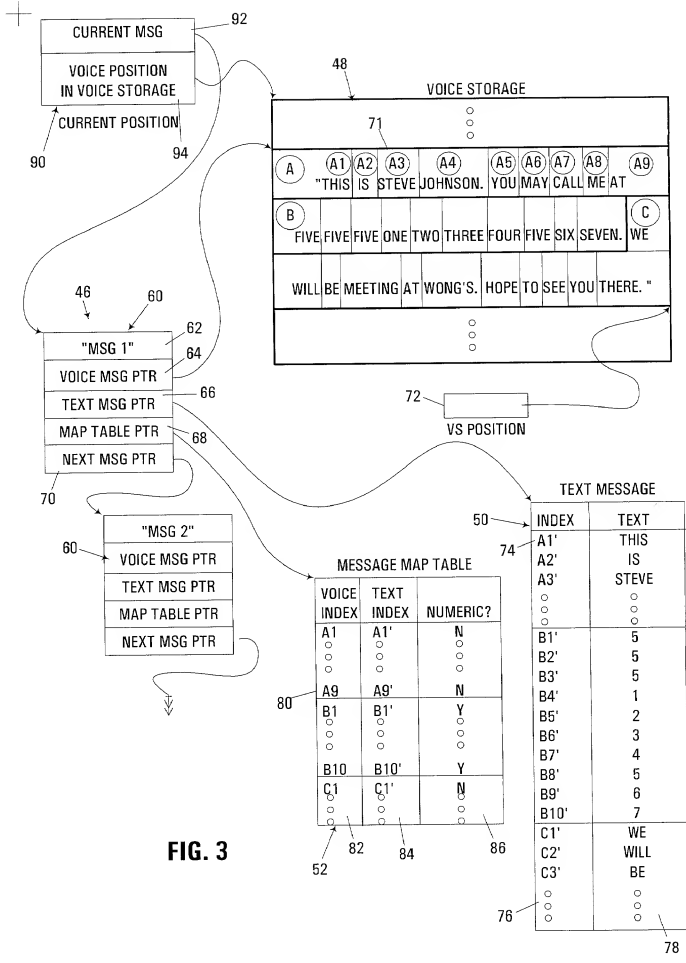


FIG. 2



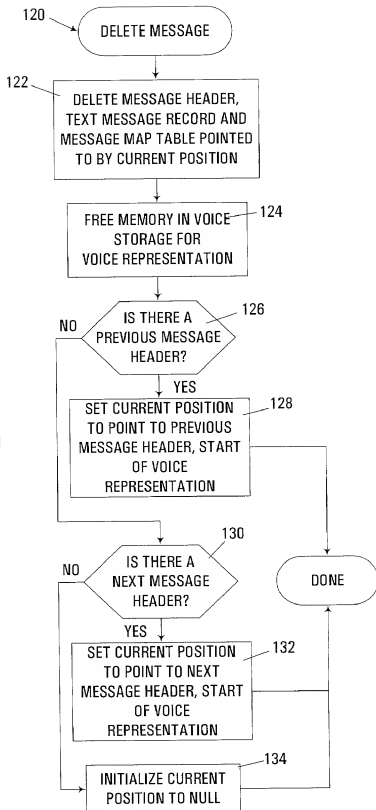
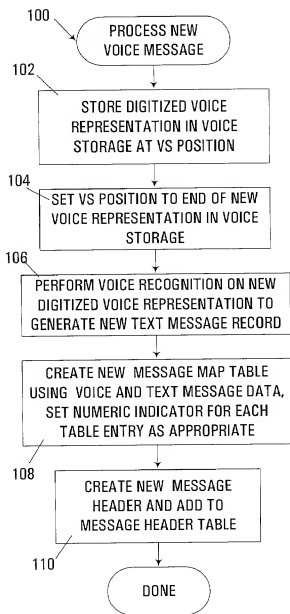


FIG. 6

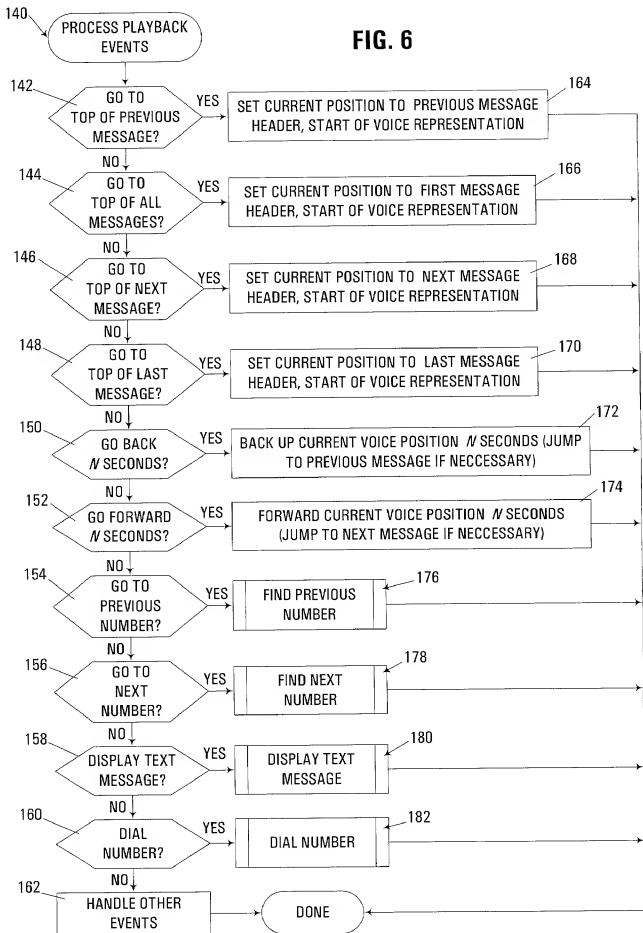


FIG. 7

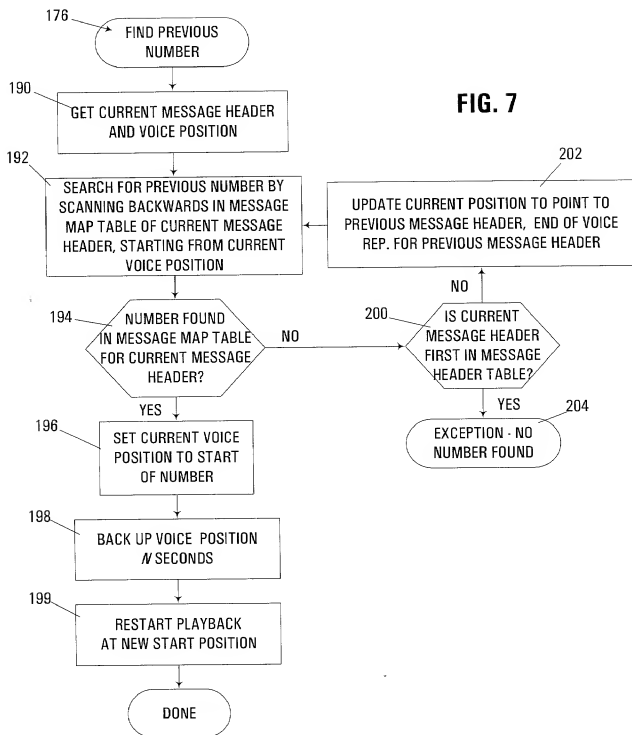


FIG. 8


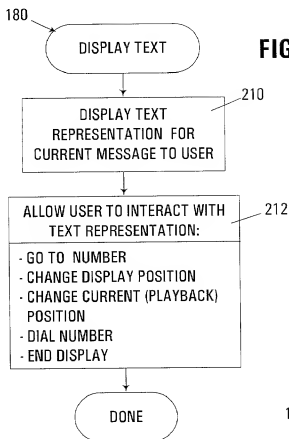


FIG. 9

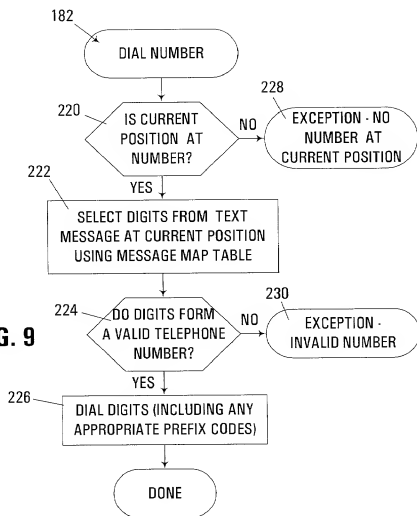

DECLARATION, POWER OF ATTORNEY, AND PETITION

As a below named inventor, I hereby declare that:

My residence, post office address and citizenship are as stated below next to my name.

I believe I am the original, first and sole inventor (if only one name is listed below) or an original, first and joint inventor (if plural names are listed below) of the subject matter which is claimed and for which a patent is sought on the invention entitled:

AUTOMATED DETECTION OF SPOKEN NUMBERS IN VOICE MESSAGES

the specification of which (check one below):

☒ is attached hereto.

☐ was filed on ____ as Application Serial No. ____ or Express Mail No. ____, and was amended on ____ (if applicable).

☐ was filed on ____ as PCT International Application No. ____, and as amended under PCT Article 19 on ____ (if any).

I hereby state that I have reviewed and understand the contents of the above identified specification, including the claims, as amended by any amendment referred to above.

I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56.

I hereby claim foreign priority benefits under Title 35, United States Code, §119 of any foreign application(s) for patent or inventor's certificate listed below and have also identified below any foreign application for patent or inventor's certificate having a filing date before that of the application on which priority is claimed:

Prior Foreign Application(s)

Priority Claimed?

_____ (Number)	_____ (Country)	_____ Day/Month/Year Filed	() Yes () No
_____ (Number)	_____ (Country)	_____ Day/Month/Year Filed	() Yes () No
_____ (Number)	_____ (Country)	_____ Day/Month/Year Filed	() Yes () No

I hereby claim the benefit under Title 35, United States Code, §120 and/or §119(e) of any United States application(s) listed below and, insofar as the subject matter of each of the claims of this application is not disclosed in the prior United States application in the manner provided by the first paragraph of Title 35, United States Code, §112, I acknowledge the duty to disclose to the United States Patent and Trademark Office all information known to me to be material to patentability as defined in Title 37, Code of Federal Regulations §1.56, which became available between the filing date of the prior application and the national or PCT international filing date of this application.

_____ (Serial No.)	_____ (Filing Date)	_____ (Status: Patented, Pending, or Abandoned)
_____ (Serial No.)	_____ (Filing Date)	_____ (Status: Patented, Pending, or Abandoned)
_____ (Serial No.)	_____ (Filing Date)	_____ (Status: Patented, Pending, or Abandoned)

I hereby appoint John D. Poffenberger (R. No. 20,245), Bruce Tittel (R. No. 22,324), Donald F. Frei (R. No. 21,190), David J. Josephic (R. No. 22,849), A. Ralph Navaro, Jr. (R. No. 23,050), David S. Stallard (R. No. 25,930), J. Robert Chambers (R. No. 25,448), Gregory J. Lunn (R. No. 29,945), Kurt L. Grossman (R. No. 29,799), Clement H. Luken, Jr. (R. No. 32,742), Thomas J. Burger (R. No. 32,662), Gregory F. Ahrens (R. No. 32,957), Wayne L. Jacobs (R. No. 35,553), Kurt A. Summe (R. No. 36,023), Kevin G. Rooney (R. No. 36,330), Joseph R. Jordan (R. No. 25,686), C. Richard Eby (R. No. 25,854), Keith R. Haupt (R. No. 37,638), Theodore R. Remaklus (R. No. 38,754), Thomas W. Humphrey (R. No. 34,353), David E. Pritchard (R. No. 38,273), David H. Brinkman (R. No. 40,532), J. Dwight Poffenberger, Jr. (R. No. 35,324), Beverly A. Lyman (R. No. 41,961), A. Ralph Navaro III (R. No. P46,207), Scott A. Stinebruner (R. No. 38,323), Kristi L. Davidson

(R. No. 44,643), P. Andrew Blatt (R. No. 44,540), David E. Franklin (R. No. 39,194), Herbert C. Brinkman (R. No. 16,955), all of Wood, Herron & Evans, L.L.P., 2700 Carew Tower, 441 Vine Street, Cincinnati, OH 45202-2917, telephone no. (513) 241-2324, and Pryor A. Garnett (R. No. 32,136), Steven W. Roth (R. No. 34,712), Owen J. Gamon (R.No. 36,143), Matthew J. Bussan (R. No. 33,614), Christopher A. Hughes (R. No. 26,914), Edward A. Pennington (R. No. 32,588), John E. Hoel (R. No. 26,279), James R. Nock (R. No. 42,937) and Joseph C. Redmond, Jr. (R. No. 18,753), care of INTERNATIONAL BUSINESS MACHINES CORPORATION, New Orchard Road, Armonk, New York 10504, my attorneys, with full power of substitution and revocation, to prosecute this application and to transact all business in the Patent and Trademark Office connected therewith. Address all correspondence and telephone calls to

Scott A. Stinebruner
Wood, Herron & Evans, L.L.P.
2700 Carew Tower
441 Vine Street
Cincinnati, OH 45202-2917
Telephone (513) 241-2324

Wherefore I pray that Letters Patent be granted to me for the invention or discovery described and claimed in the foregoing specification and claims, and I hereby subscribe my name to the foregoing specification and claims, declaration, power of attorney, and this petition.

I hereby declare that all statements made herein of my own knowledge are true and that all statements made on information and belief are believed to be true; and further that these statements were made with the knowledge that willful false statements and the like so made are punishable by fine or imprisonment, or both, under Section 1001 of Title 18 of the United States Code and that such willful false statements may jeopardize the validity of the application or any patent issued thereon.

Full name of Inventor Cary Lee Bates

Inventor's Signature

Cary Lee Bates

Date

1-25-00

Residence City/State Rochester, Minnesota

Citizenship U.S.

Post Office Address 450 73rd Street NW, Rochester, Minnesota 55901

Full name of Inventor Paul Reuben Day

Inventor's Signature Paul Reuben Day Date 1-25-2000

Residence City/State Rochester, Minnesota Citizenship U.S.

Post Office Address 1428 12 Avenue NE, Rochester, Minnesota 55906

Full name of Inventor John Matthew Santosuosso

Inventor's Signature John Matthew Santosuosso Date 1-25-00

Residence City/State Rochester, Minnesota Citizenship U.S.

Post Office Address 1402 30th Street NW, Rochester, Minnesota 55901